

## Full Factory Reset for Wireless USB Dongle Connection


1. Unplug the USB Dongle.
2. Scan the barcodes below in order.
  - No need to print these codes, they can be scanned from the screen.
  - The scanner may not make sounds or vibrate while scanning certain codes, this is normal behavior.

Step 1



000B0

Step 2

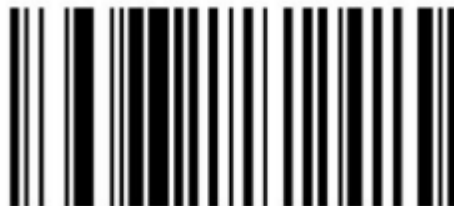


000601

# SCANAVENGER

Step 3



Step 4

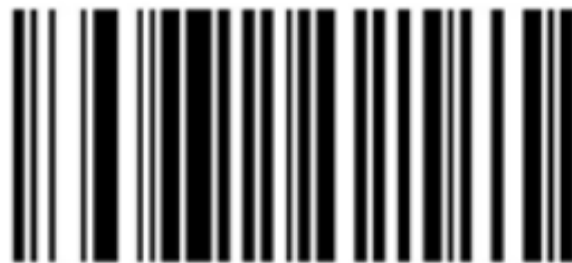

014200

# SCANAVENGER

Step 5



0000

Step 6



0001


# SCANA V E N G E R

Step 7



%%SpecCode93

Step 8

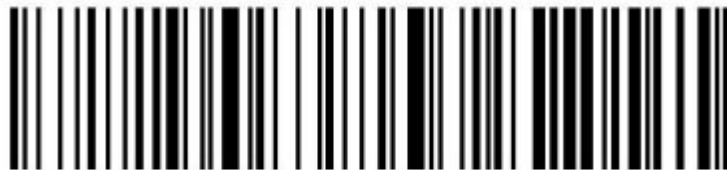

%%SpecCode79

# SCANAVENGER

Step 9



%%SpecCode77

Step 10



%%SpecCode35

# SCANAVENGER

Step 11



Step 12



# SCANAVENGER

Step 13



Step 14



# SCANAVENGER

Step 15



ScanAvenger

Step 16



%%SpecCode92

# SCANAVENGER

Step17



%%SpecCodeA8

Step 18



%%SpecCode99

3. Plug the Dongle back in.
4. Confirm connection.
  - Your scanner will pair with the dongle.
  - A solid blue light on the scanner confirms a successful connection.